




GÜNTHER^{GmbH}

Temperaturmesstechnik

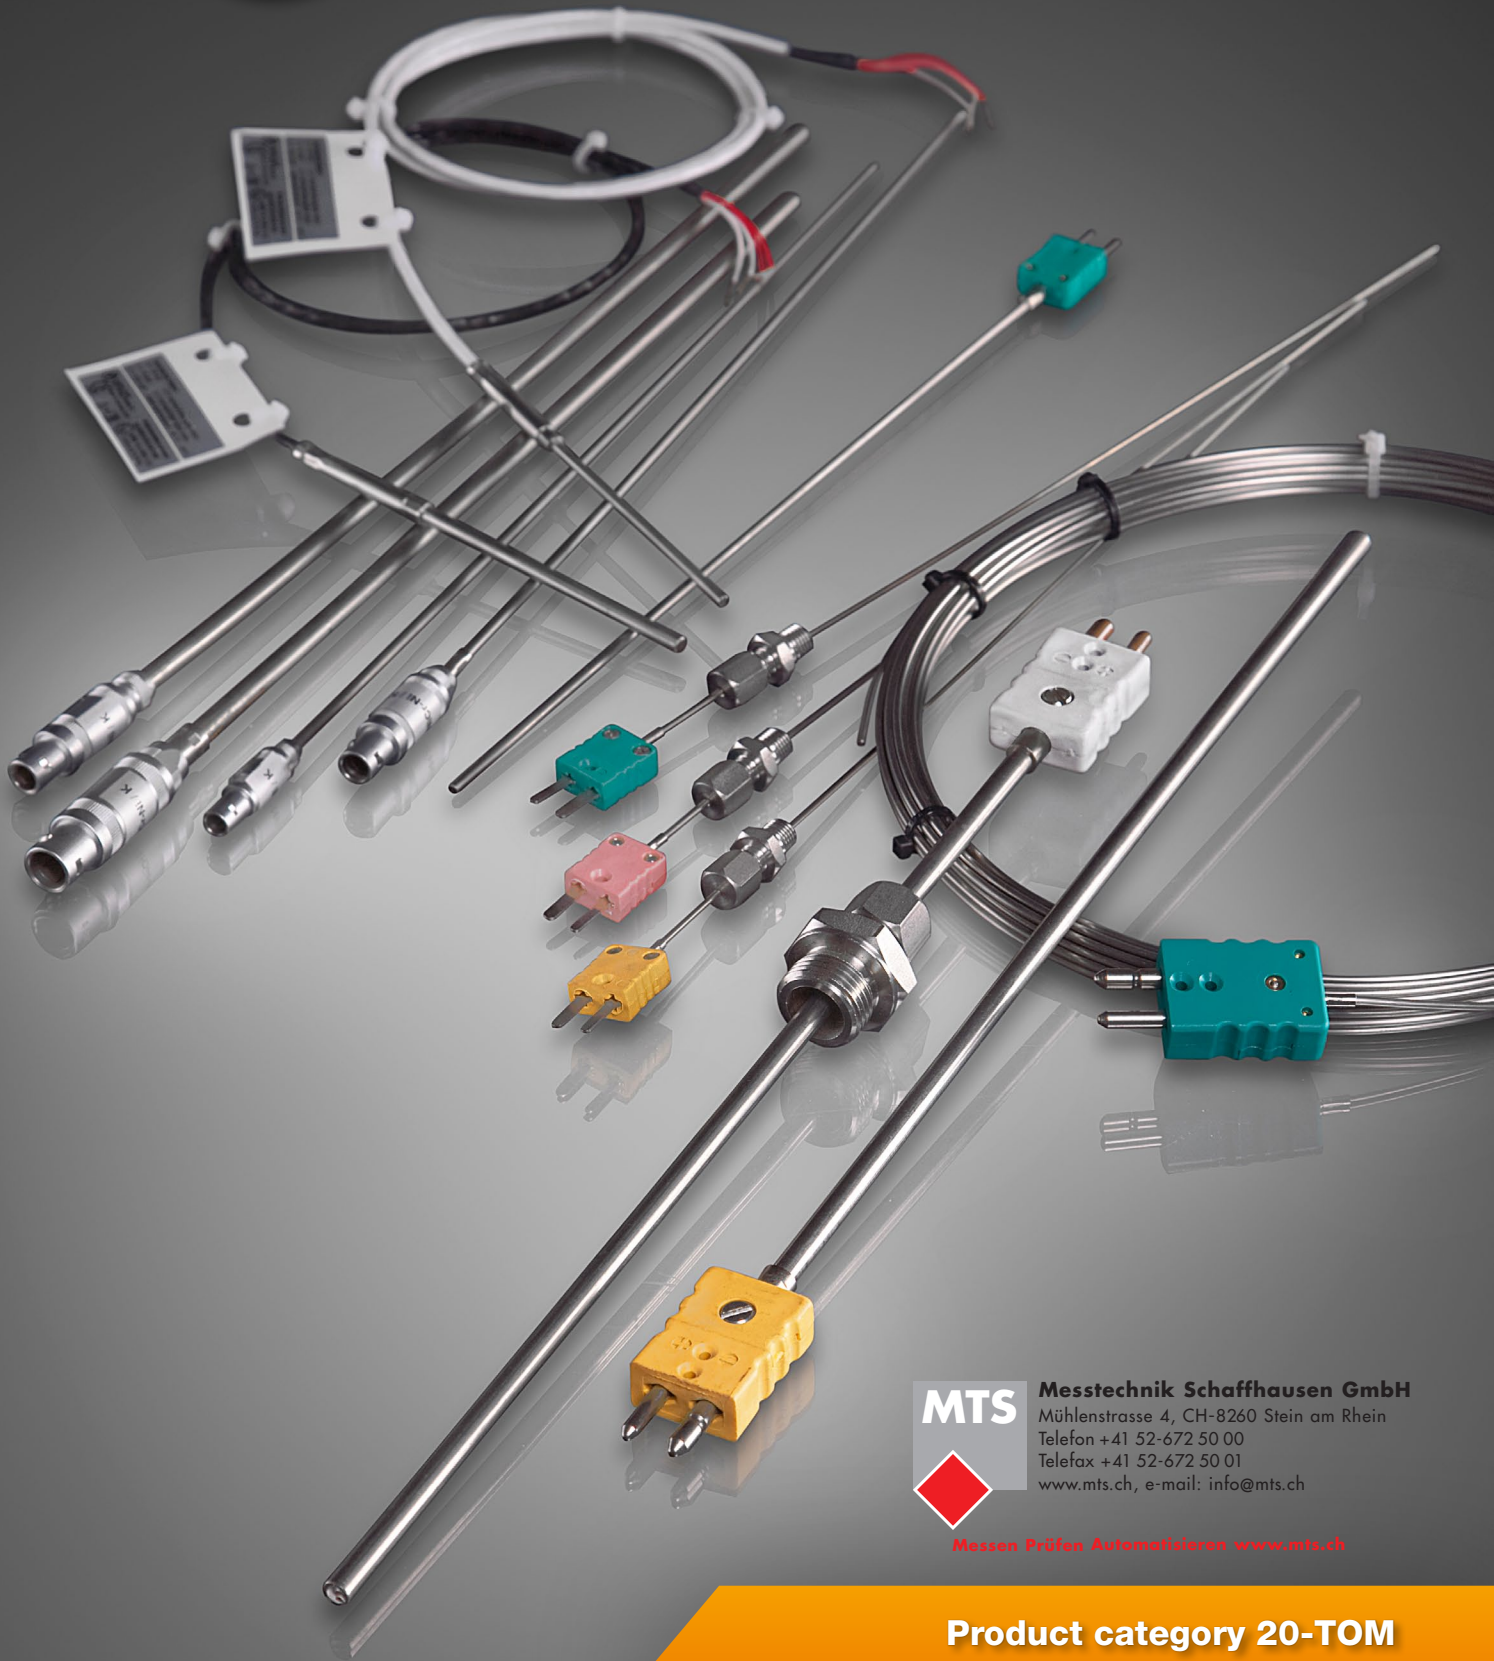

MTS **Messtechnik Schaffhausen GmbH**
Mühlenstrasse 4, CH-8260 Stein am Rhein
Telefon +41 52-672 50 00
Telefax +41 52-672 50 01
www.mts.ch, e-mail: info@mts.ch

Messen Prüfen Automatisieren www.mts.ch

Product category 20-TOM
Sheathed Thermocouple Assemblies
without Protection Tube



Application Examples for Sheathed Thermocouple Assemblies without Protection Tube:



Waste Recycling / Incineration



Glass Industry



Plant and Machine Construction



Automobile Industry



Heat Treatment



Laboratories



Industrial Furnace Construction



Aluminium and Nonferrous Metal Industry



Cement and Building Material Industry



Energy Production



Plastic Industry

20-TOM

Sheathed Thermocouple Assemblies without Protection Tube

Sheathed thermocouple assemblies without protection tube (20-TOM) are used in almost every branch of industry up to a temperature of 1100°C, with a platinum-rhodium-mantle up to 1300°C. Sheathed thermocouple assemblies essentially consist of thermo wires (inner conductors) insulated with high-purity, condensed magnesium oxide powder and an external mantle (sheath) of heat-resistant high-grade steel or nickel alloy (e.g. Inconel 600®). Sheathed thermocouple assemblies are available in single, double or triple element version. The outer diameter lies somewhere between 0,25 mm and 8,0 mm depending on technical assembly and customer preference. As a result of their structure, sheathed thermocouple assemblies offer numerous advantages when compared to their conventional counterparts.

- Small dimensions for temperature measurements at measuring sites with difficult accessibility (any desired length available)
- Short response time for exact measurements of temperature fluctuations
- Vibration and pressure resistant
- Optimal protection of inner conductors against corrosion, oxidation, mechanical damage and chemical contamination
- Increased stability of electric insulation compared to ceramic insulated thermocouples
- Simple and sealed assembly

Availability

We are able to deliver every current design and diameter of sheathed thermocouple assemblies with mounted sockets, connection heads, compensation cables, as well as accessories and mounting structures of every type.

For specialised requirements and standards (such as AMS, CQI-9, etc.), we offer sheathed thermocouple assemblies available with exceptionally narrow tolerances, often referred to as “better class 1”. Thermoelectric voltages and tolerances of our mineral-insulated gauge slides are pursuant to DIN EN 60584, class 1.





① Connectors (Plug/Socket)

LEMO Size 0 - 3
Standard
Miniature
High-Temp.-Standard
High-Temp.-Miniature
Ceramic-Standard
Ceramic-Miniature

② Connection Head

With connecting thread	
B	(M24 x 1,5)
BUS	(M24 x 1,5)
BUZ	(M24 x 1,5)
BUZH	(M24 x 1,5)
BBK	(M24 x 1,5)
DL (MA)	(M10 x 1)

or with thread diameter of 15,3 mm

③ Process Connector (Detachable)

Clamp Connectors	Steel/High-Grade Steel
Pressure Ring	Teflon
Cutting Ring	High-Grade Steel


M 8x1 for Mantle Diameter 1,0-3,0 mm
G 1/8 A for Mantle Diameter 1,0-3,0 mm
G 1/4 A for Mantle Diameter 4,5-8,0 mm
G 1/2 A for Mantle Diameter 4,5-8,0 mm

④ Sheathed Thermocouple

(Thermocouple/Mantle Materials)

NiCr-Ni/K	Inconel 2.4816
Fe-CuNi/L	1.4541/2.4816
Fe-CuNi/J	1.4541/2.4816
PtRh-Pt/S	Inconel 2.4816
Nicrosil-Nisil/N	Inconel 2.4816
Mantle Diameter:	0,5 - 8 mm
Single, Double or Triple	

Example of a common implementation in this product line

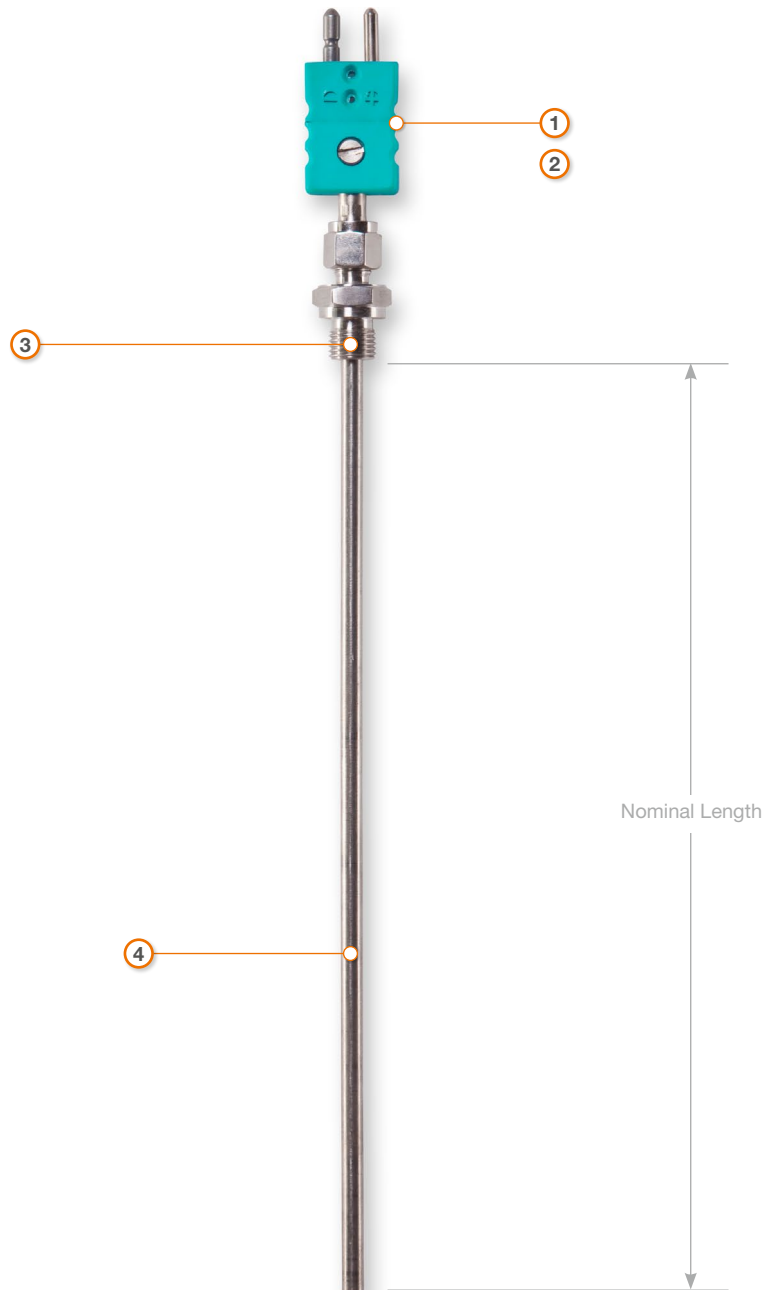

Individual Solutions such as, for example materials, process connectors, accessories, etc. not listed here, are often viable.

Please contact us for further information!

20-TOM Product Number Code

20 - TOM // Sheath thermocouples without protection tube

Sheath thermocouple

2	0	-													
---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--

Connection head

with a connection thread			with a connection diameter of 15.3 mm		
B	(M24 x 1.5)	20 10	B		25 10
BUS	(M24 x 1.5)	20 15	BUS		25 15
BUSH	(M24 x 1.5)	20 20	BUSH		25 20
BUZ	(M24 x 1.5)	20 25	BUZ		25 25
BUZH	(M24 x 1.5)	20 30	BUZH		25 30
BBK	(M24 x 1.5)	20 35	BBK		25 35
DL (MA)	(M10 x1)	20 40	DL (MA)		25 40

Nominal length / mm

Joining elements

Plug			Coupler		
Lemo	Size 0	30 10	Lemo	Size 0	35 10
Lemo	Size 1	30 15	Lemo	Size 1	35 15
Lemo	Size 2	30 20	Lemo	Size 2	35 20
Lemo	Size 3	30 25	Lemo	Size 3	35 25
Standard		30 30	Standard		35 30
Miniature		30 35	Miniature		35 35
High-temp standard		30 40	High-temp standard		35 40
High-temp miniature		30 45	High-temp miniature		35 45
Ceramic standard		30 50	Ceramic standard		35 50
Ceramic miniature		30 55	Ceramic miniature		35 55

Cable transition sleeve + compensation cable **4X XX**
(XXX = length of the compensation cable in XX.X m)

Sheath element (type/number of thermocouples/sheath material/diameter)

Thermocouple Sheath material	NiCr-Ni /K			Fe-CuNi/L		Fe-CuNi/J		PtRh-Pt/S		Nicrosil-Nisil/N	
	Standard	Double	Triple	Standard	Double	Standard	Double	Standard	Double	Standard	Double
Sheath ø / mm											
0.5	01	-	-	-	-	-	-	-	-	-	-
1	02	-	-	22	-	42	-	62	-	82	-
1.5	03	13	-	23	33	43	53	63	73	83	93
2	04	14	-	24	34	44	54	64	74	84	94
3	05	15	69	25	35	45	55	65	75	85	95
4.5	06	16	79	26	36	46	56	66	76	86	96
6	07	17	89	27	37	47	57	67	77	87	97
8	08	18	99	-	-	-	-	-	-	-	-
3.2	09	19	-	-	-	-	-	-	-	-	-

Special size / Special material

00

Fastening:

Attachment screw joint: Material **Steel / Stainless steel**

(Tapered ring unit, mat. no. 1.4541)

M 8 x 1 for sheath ø 1.0-3.0 mm	11	21
G 1/8 A for sheath ø 1.0-3.0 mm	12	22
G 1/4 A for sheath ø 4.5-8.0 mm	13	23
G 1/2 A for sheath ø 4.5-8.0 mm	14	24

(Tapered ring unit St. 35.8)

M 8 x 1 for sheath ø 1.0-3.0 mm	51	31
G 1/8 A for sheath ø 1.0-3.0 mm	52	32
G 1/4 A for sheath ø 4.5-8.0 mm	53	33
G 1/2 A for sheath ø 4.5-8.0 mm	54	34

Screw joint

G 1/4 A	80
G 3/8 A	81
G 1/2 A	82
G 1 A	83
M 20 x 1.5	84
M 18 x 1.5	85
M 14 x 1.5	86

(Teflon thrust collar)

M 8 x 1 for sheath ø 1.0-3.0 mm	61	41	
G 1/8 A for sheath ø 1.0-3.0 mm	62	42	No fastening
G 1/4 A for sheath ø 4.5-8.0 mm	63	43	
G 1/2 A for sheath ø 4.5-8.0 mm	64	44	Other
			88

Custom designs:

2	0	-	9	9	2	0	x	x	x	x				
---	---	---	---	---	---	---	---	---	---	---	--	--	--	--

Consecutive no.

Nominal length / mm



MTS Messtechnik
Schaffhausen GmbH
CH-8260 Stein am Rhein
Telefon +41 52-672 50 00

Messen Prüfen Automatisieren www.mts.ch